


Mini Environment Monitoring System

SNMP and Web Monitoring/Management of Critical IT and A/V Operations

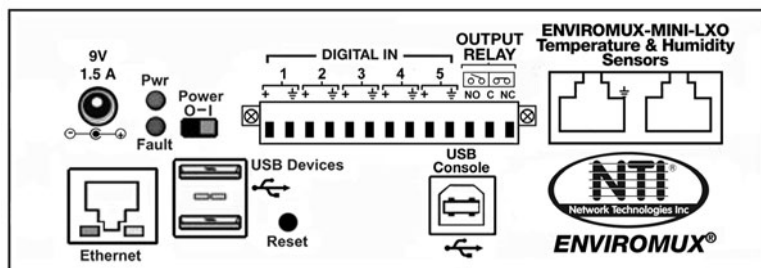

ENVIROMUX-MINI-LXO / ENVIROMUX-MINI-LXO-IND	
Sensor Ports	2 RJ45 jacks
Digital Inputs	5 screw terminal pairs
Output Relay	1 screw terminal pair; normally open / normally closed connection points
USB Console Port	One female USB Type B connector for terminal access
Ethernet Port	One 10/100 Base-T Ethernet port with RJ45 jack
USB Ports	2 female USB Type A connectors for connecting USB modem or for downloading log data to USB flash drive
Alerts	6 methods
Email	Authenticates
Web Page	Y
SNMP network management	Y
Front Panel LEDs	LEDs for sensors and power
Voice Phone Calls	Via Automatic Voice Dialer System (not included)
SMS Messages	Via external USB 3G modem (not included)
Smart Alerts	<ul style="list-style-type: none"> Up to 50 sensor conditions (events) can be configured to trigger alerts by themselves Up to 20 Smart Alerts can be configured to use different event combinations to send alert messages
Control Methods	4 methods
Web Interface	HTTP/HTTPS Supports up to 16 user accounts
Telnet	Y Two user levels: user and administrator
Network Operation (SNMP)	V1/V2c/V3
USB Serial Interface	Y Two user levels: user and administrator
Monitor (Ping) IP Devices	Up to 16 devices
Protocols	HTTP/HTTPS, SNMP V1/V2c/V3, SMTP, TCP/IP, Syslog, SNTP, DHCP, SSHv2, SSLv3, TLS, LDAPv3, AES 256-bit, 3DES, Blowfish, RSA, EDH-RSA, Arcfour, IPV6, WAP 2.0
Flash Upgradeable	Y
Operating Temperature	<ul style="list-style-type: none"> ENVIROMUX-MINI-LXO: 32°F to 104°F (0°C to 40°C). ENVIROMUX-MINI-LXO-IND: 32°F to 167°F (0°C to 75°C).
Storage Temperature	-20°F to 176°F (-20°C to 80°C).
Operating & Storage Relative Humidity	17 to 90% non-condensing RH
Power	<ul style="list-style-type: none"> 110 or 220 VAC at 50 or 60 Hz via AC adapter Optional backup battery – provides backup power for two hours Use the PWR-48V-12V1-6A DC-DC power converter to install the ENVIROMUX-MINI-LXO in a 48V or 24V Telecom environment.
Dimensions WxDxH (in)	5.67x2.10x2.10
Mounting	Zero-RU Optional DIN rail mounting
Regulatory Approvals	CE, RoHS
Warranty	2 years